


NOTES:

1. SAMPLING TAPS SHALL USE STANDARD SERVICE TAPS IF AVAILABLE, OTHERWISE INSTALL THIS AT ENDS OF LINE OR AS DIRECTED BY THE ENGINEER.
2. SAMPLING TAP TO REMAIN AND BE REMOVED BY CITY.
3. BEYOND TRAVEL LANES EXTEND 18" MIN. ABOVE GRADE.
4. IF SADDLE IS REQUIRED BY ENGINEER, USE BRASS TYPE
5. SAMPLING AND SERVICE TAPS MUST HAVE SAMPLE PORT PER DETAIL 5100-2 OR SIMILAR WHEN USED FOR SAMPLING.

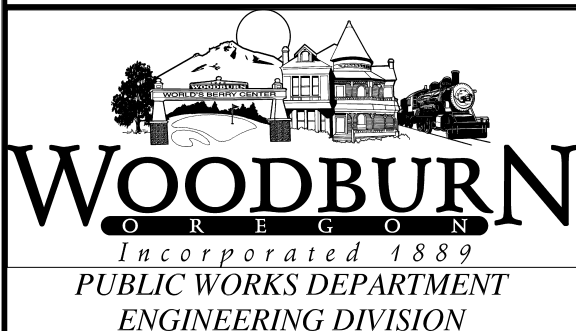

**SAMPLING TAP
ASSEMBLY**

REV: SEPT. 2020

SCALE: NTS

DET No.

5100-1